

Jackofoam® 400

Product data sheet

Product description

Jackofoam® is our brand for extruded polystyrene (XPS). It has high compressive strength, low moisture absorption, long service life and is capillary breaking. The boards has straight or beveled edges in different formats and thicknesses. Jackofoam® is lightweight and easy to work with without causing discomfort to the eyes, airways, and skin. Jackofoam® is applied when installing insulation on ground and frost insulation, and can be used for both light and heavy constructions. The product has a unique combination of user- and environmental friendliness while being cost-effective.

Field of application

Insulation for a wide variety of applications, including insulation of foundations at high load, frost insulation, roads, railways, airfields, VA lines and inverted roofs.

Colour

Purple

Surface treatment


-

Technical data

| Specifications | Standard | Unit | JF400 |
|---|--------------|--------------|--------------------|
| Declared thermal conductivity, λ_D | EN 13163 | W/mK | 0,034-0,035 |
| Compressive strength | EN 826 | kPa | 400 |
| Permissible long-term load 2% deformation (nominal last). | EN 1606 | kPa | 180 |
| E-module, long term | - | kPa | 9000 |
| Water absorption, submerged | EN/ISO 16535 | Vol% | ≤ 0,7 |
| Relative water vapor resistance | EN 10456 | μ factor | 150 |
| Capillarity | - | | Capillary breaking |
| Fire properties (class) | EN 135001-1 | | NPD (prev F class) |
| Max. temperature | - | °C | 70 |
| Length expansion coefficient | EN 822 | mm/m °C | 0,07 |

Assembly/safety precautions

No dangers under regular handling. Installation/assembly must comply with regulations or guidelines. Cut with filament, a heated knife, or a hand saw/jigsaw as an option.

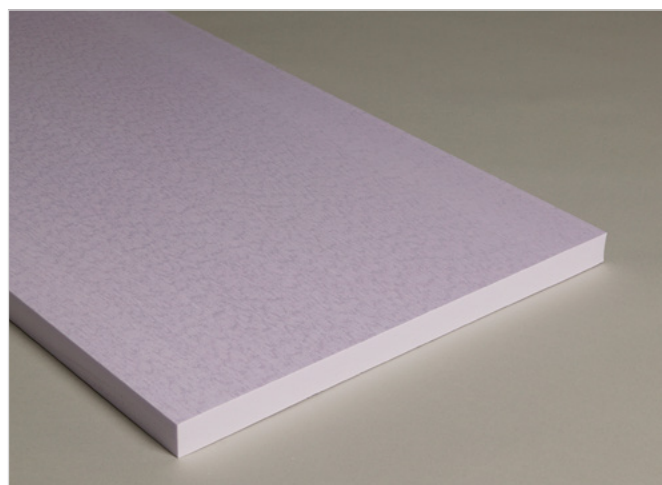

Transport and storage

The product is not classified as dangerous goods. The product must be stored in a well-ventilated area away from ignition sources and organic solvents. If stored for an extended period, the product should be shielded from UV rays and high winds, as it can blow away. Be careful when handling it, as the boards may break.

Recycling/waste management

Waste type: Extruded plastic

Waste management: Material recycling at recycling centre or energy recovery.

SS 9431 code for waste management: 1732/ 0014/ 6000

EAL code: 170604: other insulation materials then mentioned in 170601 and 170603.

Other information: BEWI is a member of FTI

Environment

The product is not classified as a health, environmental, or fire hazard. EPD is available, the product is registered in Byggarubedömningen, Sunda Hus, BASTA and Svanens husportal (Nordic Ecolabelling).

Product documentation and public requirements

Product approvals issued by accredited control organs: Accredited control organs issue no product documentation for this product.

European standard: XPS insulation board is CE marked, standard no EN 13163

Other national/international control systems, certificates, industry standards, etc. Common technical system for declaring building insulation EN 13172.

BEWI Insulation Sverige

Kundcenter 0500- 38 28 20 | order-SE.insulation@bewi.com

Teknisk Kundservice 031-795 90 38 | support-SE.insulation@bewi.com | bewi.com